

## SMART PROCESSING UNITS



### Customer driven solutions for:

- Wool top units
- Defelting, blending and recombining units
- Worsted spinning preparation units
- Tow to top units
- Semi-worsted units
- Hard fibres units

# FM20 horizontal rubbing frame

*The finishing passage of flexible units*

The FM20 horizontal rubbing frames are preparation finishers intended to produce rubbed roving in the count range Nm 0.66 to 5.5 or finer.




## Model FM20L

- Tube length: 300 mm
- Max bobbin weight: 4,7 kg of material

## Model FM20S

- Tube length: 243 mm
- Max bobbin weight: 3,8 kg of material

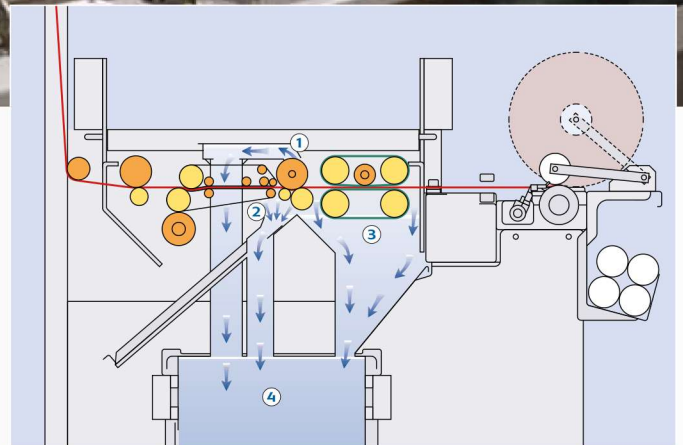

Especially appreciated in production units for small lots, the FM20 horizontal rubbing frames reach a speed of 220 m/min with a rubbing speed up to 1200 cycles/min.

The elaborated design and the precise adjustment of the drafting, rubbing and winding-up elements as well as an efficient suction ensure attractive operational costs and products of excellent quality.

The man/machine dialogue is achieved by a touch type screen terminal giving access to production counter, speed and machine faults diagnosis.

The FM20 horizontal rubbing frame is available with 12, 16, 20 or 24 heads with manual doffing.